

U2SMT230GM USB2.0 Camera



- ◆ Resolution: 2.3 MP
- ◆ Frame Rate: 24 fps
- ◆ Mono/Color: Mono
- ◆ Shutter: Global Shutter
- ◆ Data Interface: USB2.0

U2SMT230GM is a brand-new USB2.0 industrial camera launched by our company. On the basis of the previous generation of products, it greatly reduces the difficulty of process assembly and further enhances the compatibility of products. The size is only 29mm x 29mm x 35mm. The USB2.0 interface has a locking seat. It is plug and play without power supply, and can be flexibly installed in different structures.

U2SMT series excellent performance, compact and lightweight. affordable, easy to install and use. Compatible with third-party machine vision development software. Our company provides a complete SDK development package and all-round technical support to help your project quickly landing. U3SMT series are suitable for transmission speed, Stability, compatibility, volume, cost-effective applications with strict requirements.

CHARACTERISTIC

- CMOS sensor, 2.3 MP
- Support hardware triggering, flash sync
- USB2.0 connector with locking seat, plug and play without power supply
- Support Windows, Android, Linux, MacOS
- The camera with frame buffer, Multiple cameras working simultaneously

SELECTION KEYPOINT


- No external power supply is required
- Aximum transmission rate 480 Mbps
- The effective transmission distance is 5 metres
- Small, suitable for more application scenarios

TECHNICAL PARAMETER

Model	U2SMT230GM
Resolution	2.3MP
Type	2.3MP 1/1.2" USB2.0 Camera
Sensor Type	CMOS
Sensor	imx249
Mono/Color	Mono
Shutter	Global Shutter
Resolution(HxV)	1920x1200
Frame Rate	24fps
Sensor size	1/1.2"
Pixel size	5.86 μ m x 5.86 μ m
SNR	40dB
Gain	8dB
Dynamic Range	70dB
Exposure Time	0.02-41943ms
Sensitivity	7400mV/lux-s
Pixel Bit depth	8/10bit
Pixel Format	Mono 8/10 Bayer 8/10
Binning	Supports 1 \times 1, 1 \times 2, 2 \times 1, 2 \times 2
Image buffer	32M Bytes
User parameter area	4K Bytes
Capture mode	Continuous/Soft trigger/Hard trigger
Data Interface	USB2.0 @ 480Mbps
transmission distance	5m
Digital I/O	I/O: One opto-isolated input, and two opto-isolated output
Power supply	5VDC, USB2.0 power supply
Power consumption	<3.0 W@5 VDC
Dimension	29mm x 29mm x 35mm (excluding len holder and interface)
Lens mount	C-mount / CS-mount
Ingress protection	IP30
Weight (typical)	70g
Temperature	Working temperature: 0 ° C to 50 ° C (32 ° F to 122 ° F) Storage temperature: -30 ° C to 70 ° C (-22 ° F to 158 ° F)
Humidity	20% to 80% RH, without condensation
Driver	DirectShow, Twain, Halcon, OCX
Software support	Halcon, OpenCV, LabView, Matlab
Development languages	C/C++, VB6, VB.net, Delphi6, C#, QT, C++Builder, LabView, Python

Operating system	Windows、Linux、Android、MacOS
Compatibility	Directshow、Twain

MECHANICAL SPECIFICATION

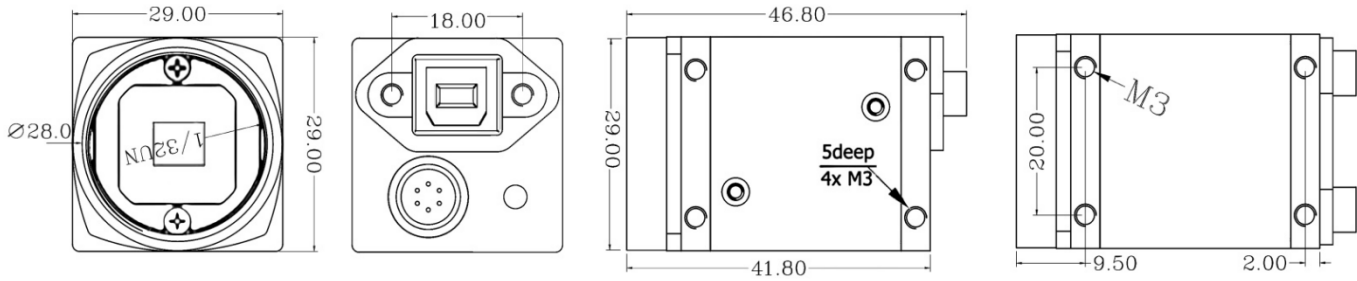

SPECTRUM CHART

