


U2BMT1000M USB2.0 Camera module

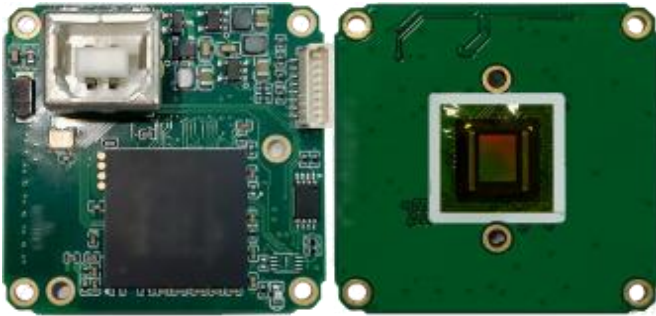

- ◆ Resolution: 10 MP
- ◆ Frame Rate: 4.5 fps
- ◆ Mono/Color: Mono
- ◆ Shutter: Rolling Shutter
- ◆ Data Interface: USB2.0

The U2BMT series has excellent performance, is compact and lightweight, affordable, easy to install and use, and is compatible with third-party machine vision development software. Our company provides a complete SDK development package and a full range of technical support to help your project land quickly. The U2BMT series is suitable for applications that have strict requirements on stability, compatibility, size, and cost-effectiveness.

CHARACTERISTIC

- CMOS sensor, 10 MP
- Support hardware triggering, flash sync
- Support Windows, Android, Linux, MacOS
- The camera with frame buffer, Multiple cameras working simultaneously

SELECTION KEYPOINT


- No external power supply is required
- Maximum transmission rate 480 Mbps
- The effective transmission distance is 5 metres
- Small, suitable for more application scenarios

TECHNICAL PARAMETER

Model	U2BMT1000M
Resolution	10MP
Type	10MP 1/2.3" USB2.0 Camera
Sensor Type	CMOS
Sensor	MT9J003
Mono/Color	Mono
Shutter	Rolling Shutter
Resolution(HxV)	3664x2748
Frame Rate	4.5fps
Sensor size	1/2.3"
Pixel size	1.67μm x 1.67μm
SNR	34dB
Gain	8dB
Dynamic Range	65.2dB
Exposure Time	0.0763-30000ms
Sensitivity	0.31V/lux-s
Pixel Bit depth	8/10bit
Pixel Format	Mono 8/10 Bayer 8/10
Binning	Supports 1×1, 1×2, 2×1, 2×2
Image buffer	32M Bytes
User parameter area	4K Bytes
Capture mode	Continuous/Soft trigger/Hard trigger
Data Interface	USB2.0 @ 480Mbps
transmission distance	5m
Digital I/O	I/O: One opto-isolated input, and two opto-isolated output
Power supply	5VDC, USB2.0 power supply
Power consumption	<3.0 W@5 VDC
Dimension	39mmx39mmx9mm (excluding len holder and interface)
Lens mount	C-mount / CS-mount
Ingress protection	IP30
Weight (typical)	16g (excluding len holder and interface)
Temperature	Working temperature: 0 ° C to 50 ° C (32 ° F to 122 ° F) Storage temperature: -30 ° C to 70 ° C (-22 ° F to 158 ° F)
Humidity	20% to 80% RH, without condensation
Driver	DirectShow, Twain, Halcon, OCX
Software support	Halcon, OpenCV, LabView, Matlab
Development languages	C/C++, VB6, VB.net, Delphi6, C#, QT, C++Builder, LabView, Python
Operating system	Windows, Linux, Android, MacOS

MECHANICAL SPECIFICATION

单位: mm

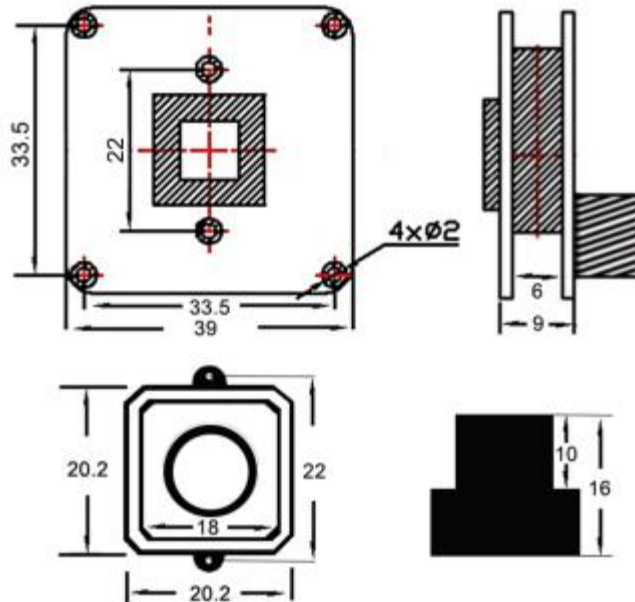

SPECTRUM CHART

