


UGBMT200GC-4C Quadruple Camera Module

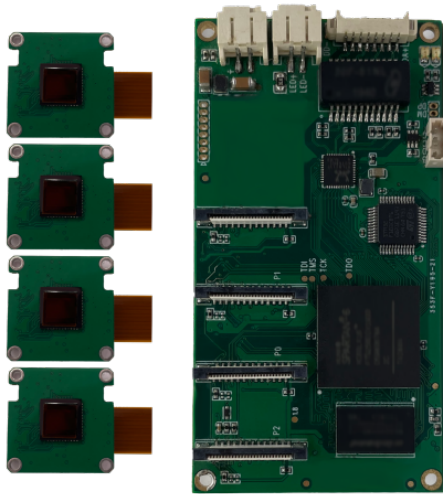

- ◆ Resolution: 2.3 MP
- ◆ Frame Rate: 13 fps
- ◆ Mono/Color: Color
- ◆ Shutter: Global Shutter
- ◆ Data Interface : GigE

Four-channel Camera

UGBMT200GC-4C is a new generation product that our engineers have fully optimized based on the third generation four-channel product. Compared with multiple cameras forming a synchronization system, users do not need to consider the synchronization mechanism. Secondary development is simple and easy to use. It can achieve nanosecond clock synchronization and achieve a higher frame rate under the same specifications and test conditions. Our company provides a complete SDK and full range of technical support to help your project land quickly. This series is widely used in 3D applications, multi-channel bonding, multi-spectral cameras, soil monitoring, optical zoom, multi-eye stereo vision measurement and other fields.

CHARACTERISTIC

- CMOS sensor, 2.3 MP
- High integration, easy to develop and use
- Nanosecond clock synchronization
- Flexible channel selection
- Support Windows, Android, Linux, MacOS

SELECTION KEYPOINT


- Aximum transmission rate 1 Gbps
- The effective transmission distance is 5 metres
- Small, suitable for more application scenarios

TECHNICAL PARAMETER

Model	UGBMT200GC-4C
Resolution	2.3MP
Type	2.3MP 1/2.6" Quadruple Camera Module
Sensor Type	CMOS
Sensor	AR0234
Mono/Color	Color
Shutter	Global Shutter
Resolution(HxV)	1920x1200
Frame Rate	13 fps
Sensor size	1/2.6"
Pixel size	3.0μm x 3.0μm
SNR	38dB
Gain	4dB
Dynamic Range	71.4dB
Exposure Time	0.010-3000ms
Sensitivity	5600mV/Lux-s
Pixel Bit depth	8/10bit
Pixel Format	Mono 8/10 Bayer 8/10
Binning	Supports 1×1, 1×2, 2×1, 2×2
Image buffer	128M Bytes
User parameter area	4K Bytes
Capture mode	Continuous/Soft trigger/Hard trigger
Data Interface	GigE @ 1Gbps
transmission distance	100m
Digital I/O	ector for power supply and I/O: One opto-isolated input, and two opto-isolated output
Power supply	12 VDC, supports PoE power supply
Power consumption	<3.0 W@12 VDC
Dimension	80mmx42mm(excluding lens mount and interface)
Lens mount	C-mount / CS-mount
Ingress protection	IP30
Weight (typical)	-
Temperature	Working temperature: 0 ° C to 50 ° C (32 ° F to 122 ° F) Storage temperature: -30 ° C to 70 ° C (-22 ° F to 158 ° F)
Humidity	20% to 80% RH, without condensation
Driver	DirectShow、Twain、Halcon、OCX
Software support	Halcon、OpenCV、LabView、Matlab
Development languages	C/C++、VB6、VB.net、Delphi6、C#、QT、C++Builder、LabView、Python

Operating system	Windows、Linux、Android、MacOS
Compatibility	USB3 Vision, GenlCam

MECHANICAL SPECIFICATION

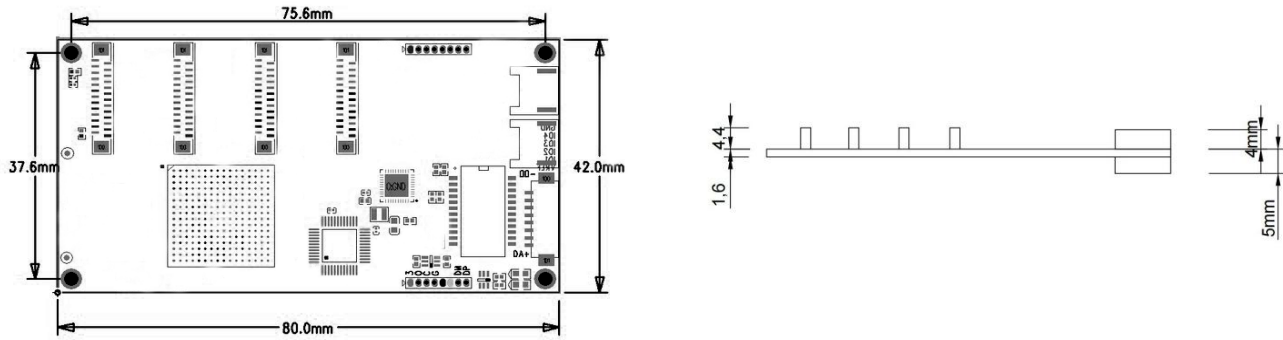

SPECTRUM CHART

